

	Type	GES 5	GES 6	GES 7	GES 8
Dimensions					
S	Blocking width	5 m	6 m	7 m	8 m
G	Total width	5 470 mm	6 470 mm	7 470 mm	8 470 mm
B	Boom length	4 855 mm	5 855 mm	6 855 mm	7 855 mm

Weights

Barrier housing	148 kg	148 kg	152 kg	152 kg
Barrier boom	10 kg	12 kg	14 kg	16 kg
Pendulum support	2 kg	2 kg	2 kg	2 kg
Total weight	160 kg	162 kg	168 kg	170 kg

Closing time

	6 s	6 s	9 s	9 s
--	-----	-----	-----	-----

Colour Barrier housing: Stainless steel, hood coated in carmine red (RAL 3002).
 Barrier boom: Aluminium, coated in white, red adhesive stripes.
 Pendulum support: High-quality galvanised and coated in carmine red (RAL 3002).
 Other colours available upon request.

Electrical data

	<u>GES 5 / GES 6</u>	<u>GES 7 / GES 8</u>
Supply voltage	230 V AC	400 V AC
Installed load	approx. 550 VA	approx. 500 VA
Current consumption	approx. 0.5 A	approx. 0.5 A
with motor running	approx. 3.5 A	approx. 1.5 A
IP rating of control unit	IP 54	IP 54

General data

Operating temperature	-20 to +45 °C
-----------------------	---------------

3.8 Electro-mechanical barrier with fixed support post 5 to 8 m

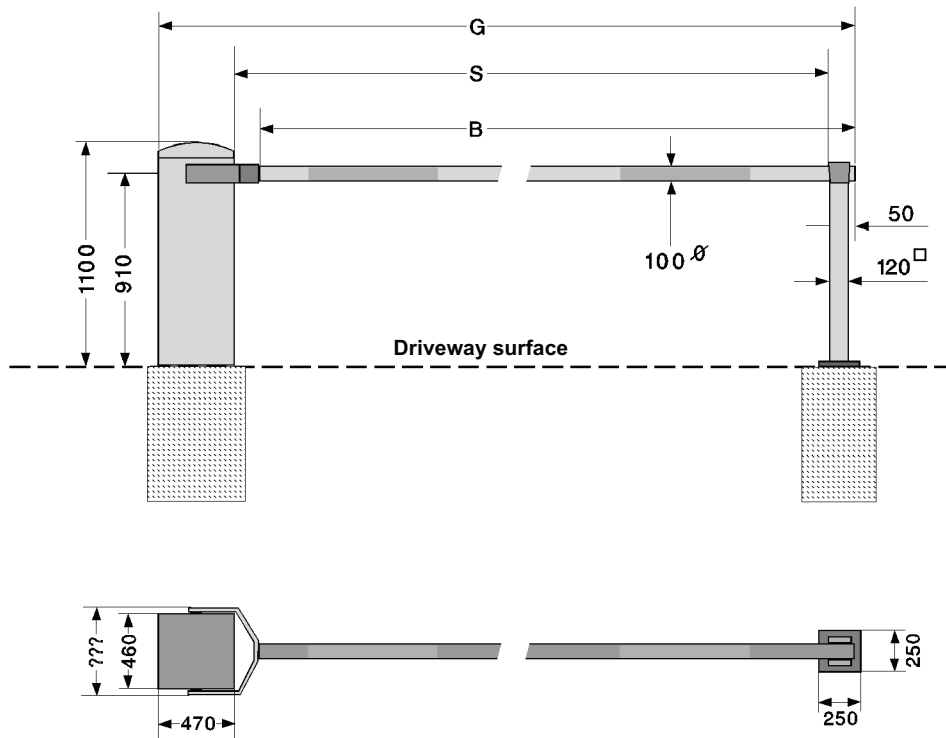


Image 3.6 Dimensional drawing: electro-mechanical barrier GES 5 – 8 with fixed support post

Type

GES 5

GES 6

GES 7

GES 8

Dimensions

S	Blocking width	5 m	6 m	7 m	8 m
G	Total width	5 470 mm	6 470 mm	7 470 mm	8 470 mm
B	Boom length	4 855 mm	5 855 mm	6 855 mm	7 855 mm

Weights

Barrier housing	148 kg	148 kg	152 kg	152 kg
Barrier boom	10 kg	12 kg	14 kg	16 kg
Fixed support post	25 kg	25 kg	25 kg	25 kg
Total weight	183 kg	185 kg	191 kg	193 kg

Closing time

6 s	6 s	9 s	9 s
-----	-----	-----	-----

Colour

Barrier housing: Stainless steel, hood coated in carmine red (RAL 3002).
 Barrier boom: Aluminium, coated in white, red adhesive stripes.
 Fixed support post: High-quality galvanised and coated in carmine red (RAL 3002).
 Other colours available upon request.

Electrical data

	<u>GES 5 / GES 6</u>	<u>GES 7 / GES 8</u>
Supply voltage	230 V AC	400 V AC
Installed load	approx. 550 VA	approx. 500 VA
Current consumption	approx. 0.5 A	approx. 0.5 A
with motor running	approx. 3.5 A	approx. 1.5 A
IP rating of control unit	IP 54	IP 54

General data

Operating temperature	-20 to +45 °C
-----------------------	---------------